




## Product Specifications

imageRUNNER ADVANCE 4051 Shown\*

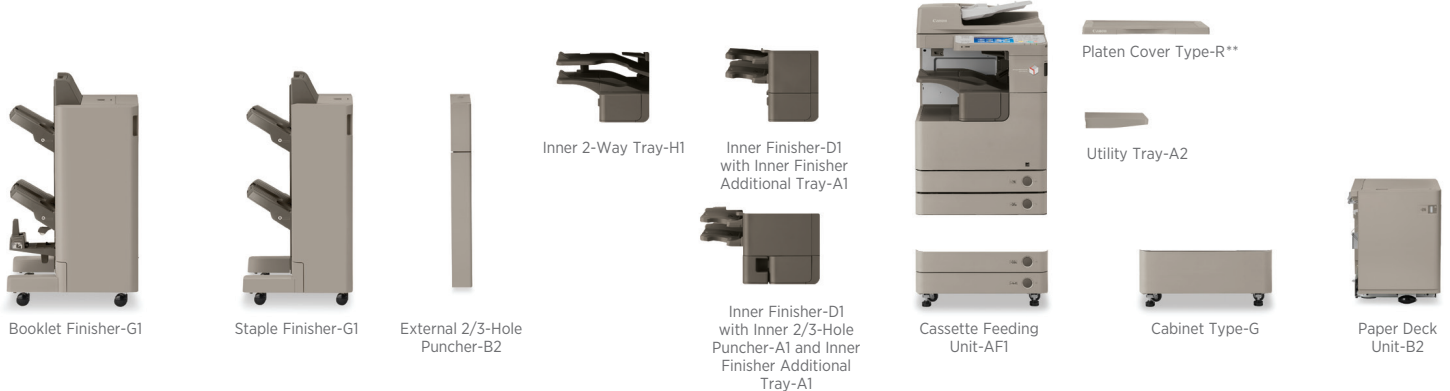

### Main Unit

#### System Type

Digital Multifunction Imaging System

#### Functions

Standard: Copy, Print (UFR II), Scan, Send, Store  
Optional: Print (PCL, Adobe® PostScript® 3™), Fax (up to 4 Lines)

#### Operation Panel

8.4" SVGA Full-color, TFT Screen

#### Memory

Standard: 1.25GB RAM  
Maximum: 1.75GB RAM

#### Hard Disk Drive

Standard: 80GB  
Maximum: 250GB

#### Mirroring Hard Disk Drive

Optional (80GB, 250GB); Method: RAID1

#### Network Interface Connection

Standard: 10/100/1000Base-TX  
Optional: Wireless LAN (IEEE 802.1x)

#### Other Interface

Standard: USB 2.0 (Host)x2, USB 2.0 (Device)  
Optional: Device Port [USB 2.0 (Host)x2], Copy Control Interface

#### Copy/Print Speed (BW)

Letter: 4051: Up to 51 ppm  
4045: Up to 45 ppm  
4035: Up to 35 ppm  
4025: Up to 25 ppm  
Legal: 4051: Up to 25 ppm  
4045: Up to 25 ppm  
4035: Up to 25 ppm  
4025: Up to 13 ppm  
11" x 17": 4051: Up to 25 ppm  
4045: Up to 22 ppm  
4035: Up to 22 ppm  
4025: Up to 15 ppm

#### Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Cassettes  
80-sheet Stack Bypass  
Optional: Dual 550-sheet Cassettes  
2,700-sheet Paper Deck  
Maximum: 4,980 Sheets

#### Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)  
Maximum: 3,100 Sheets (with Staple Finisher or Booklet Finisher)

#### Output Paper Sizes

Cassette 1: Legal, Letter, Letter-R, Statement-R, Executive  
Cassettes 2/3/4: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (140mm x 182mm to 297mm x 431mm)]  
Bypass: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [3-7/8" x 5-7/8" to 11-3/4" x 17" (99mm x 148mm to 297mm x 431mm)]  
Other Option: Envelope Feeder Attachment\*\*\* (COM10 No. 10, Monarch, DL, ISO-C5, ISO-B5)

#### Acceptable Paper Weights

Cassettes: 16 lb. Bond to 34 lb. Bond (60 to 128g/m<sup>2</sup>)  
Bypass: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

#### Duplexing

Paper Size: Standard Automatic Trayless Duplexing (up to 11" x 17")

Paper Weights: 14 lb. Bond to 28 lb. Bond (52 to 105g/m<sup>2</sup>)

#### Special Media Support

Tracing, Labels, Transparency, and Envelopes

#### Warm-up Time

From Power On: 38 Seconds or Less

#### From Sleep Mode:

10 Seconds or Less

#### Power Requirements/Plug

4051: 120V AC 60Hz, 10.4A/NEMA 5-15P  
4045/4035: 120V AC 60Hz, 9.3A/NEMA 5-15P  
4025: 120V AC 60Hz, 7A/NEMA 5-15P

#### Power Consumption

4051/4045/4035: Maximum: 1,500W; Sleep Mode: 1W  
4025: Maximum: 1,300W; Sleep Mode: 1W

#### Dimensions (H x W x D)

4051/4045: 35-1/2" x 22-1/4" x 27-7/8" (909mm x 565mm x 708mm)  
4035/4025: 30-1/4" x 22-1/4" x 27-5/8" (769mm x 565mm x 700mm)

#### Installation Space (W x D)

(when the Multi-Purpose Tray is extended)

4051/4045: 35-1/2" x 27-7/8" (909mm x 708mm)  
4035/4025: 34-1/2" x 27-5/8" (876mm x 700mm)

#### Weight

4051/4045: Approximately 172 lb. (77.9kg)<sup>□</sup>  
4035/4025: Approximately 154 lb. (70kg)<sup>□</sup>

#### Toner (Estimated Toner Yield @ 6% Coverage)

4051/4045: 34,200 Images  
4035/4025: 30,200 Images

#### Image Reader Unit

##### Scan Resolution

Up to 600 x 600 dpi<sup>□□</sup>

##### Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional Objects [up to 4.4 lb. (2kg)]

##### Maximum Original Size

Up to 11" x 17"



## Main Unit (continued)

### Document Feeder

#### Scan Method

Duplexing Automatic Document Feeder  
(Standard on 4051/4045)  
(Optional on 4035/4025)

#### Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R, Statement

Paper Weights: BW: 13 lb. Bond to 34 lb. Bond (50 to 128g/m<sup>2</sup>)  
Color: 17 lb. Bond to 34 lb. Bond (64 to 128g/m<sup>2</sup>)

#### Scan Speed (BW/Color; Letter)

Simplex: 51/51 ipm (300 dpi)  
51/30 ipm (600 dpi)<sup>□□</sup>

#### Paper Capacity (20 lb. Bond)

100 Sheets

### Copy Specifications

#### First-Copy-Out Time (Letter)

**4051:** 3.7 Seconds

**4045/4035:** 3.8 Seconds

**4025:** 5.2 Seconds

#### Multiple Copies

1 to 999

#### Copy Exposure

Automatic or Manual (9 levels)

#### Magnification

From Platen Glass: 25% - 400% (1% increments)

From ADF: 25% - 200% (1% increments)

#### Preset Reductions

25%, 50%, 64%, 73%, 78%

#### Preset Enlargements

121%, 129%, 200%, 400%

#### Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-sided, Density/Exposure Adjustment, Original Type Selection, Interrupt Mode, Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset, Guide Display, Job Duration Display, Reserved Copying

#### Special Copy Features

Two-page Separation, Booklet, Job Build, N on 1, Add Cover, Sheet Insertion, Different-size Original, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Block, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Favorite Setting, Previous Settings, Secure Watermark (Optional)

### Print Specifications

#### Processor

Canon Dual Custom Processor (Shared)

#### Memory

Standard: 1.25GB RAM

Maximum: 1.75GB RAM

#### Hard Disk Drive

Standard: 80GB

Maximum: 250GB

#### Engine Resolution

1200 x 1200 dpi

#### PDL Support

Standard: UFR II

Optional: PCL 5e, PCL 6, Adobe PostScript 3

#### Print Driver Supported OS

UFR II, Windows® (XP/Windows Vista®/Windows 7/Server 2003/Server 2008/Server 2008 R2, Small Business Server 2011), Windows Terminal Servers (Windows 2000/Server 2003/Server 2008/Server 2008 R2), Microsoft® Failover Cluster (Windows 2000 Server/Server 2003/Server 2003 R2/Server 2008/Server 2008 R2), Small Business Server 2011, Citrix (Presentation Server 4.5, XenApp 5.0/6.0, XenDesktop 2.0/2.1/3.0/4.0/5.0), Macintosh® (OS X 10.4.9 or later), VMware (vSphere 4), SAP (UFR II only)

PCL 5e/6: Windows (Windows 2000/XP/Windows Vista/Windows 7/Server 2003/Server 2008/Server 2008 R2, Small Business Server 2011), Windows Terminal Servers (Windows 2000/Server 2003/Server 2008/Server 2008 R2), Small Business Server 2011, Microsoft® Failover Cluster (Windows 2000 Server/Server 2003/Server 2003 R2/Server 2008/Server 2008 R2), Citrix (Presentation Server 4.5, XenApp 5.0/6.0, XenDesktop 2.0/2.1/3.0/4.0/5.0), VMware (vSphere 4), SAP

#### Direct Print Support

Standard: TIFF, JPEG, EPS<sup>□□□</sup>

Optional: PDF, XPS<sup>□□□</sup>

#### Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secure Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Printing on Transparencies, Front/Back Covers, Objective, Toner Reduction, Poster Printing

### Scan Specifications

#### Network TWAIN Scan

Standard

#### Network Scan Utility

Color Network ScanGear

### Universal Send Specifications

#### Sending Method

E-mail, I-Fax, File Server (FTP, SMB, WebDAV), Mail Box, Super G3 Fax (Optional)

#### Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black), Full Color, Grayscale, B/W

#### Scan Resolution<sup>□□</sup> (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

#### Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-Touch Buttons)

#### Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

#### File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF (Apply Policy), PDF (Optimize for Web), PDF/A-1b, XPS, XPS (Compact)

Optional: PDF (Trace & Smooth), PDF/XPS (OCR), PDF (Encrypted), PDF/XPS (Digital Signature), PDF (Reader Extensions)

#### I-Fax Data Format

BW: TIFF (MH, MR, MMR)

#### Universal Send Features

Two-sided Original, Different-size Originals, Original Type Selection, Book to Two Pages, Density Adjustment, Sharpness, Document Name, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, Sender's Name (TTI), E-mail Priority

### Fax Specifications

#### Maximum Number of Connection Lines

4

#### Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

#### Compression Method

MH, MR, MMR, JBIG

#### Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

#### Sending/Recording Size

Statement to 11" x 17"

#### Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Selecting the Telephone Line (when sending fax), Delayed Send, Preview, Finished Stamp, Job Done Notice, Original Type Selection, Two-sided Original, Book to Two Pages



## Main Unit (continued)

### Store Specifications

<b>Mail Box</b>	
Number Supported:	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes
Maximum Pages Stored:	6,000

### Advanced Box

Available Disk Space:	Approximately 10GB (Standard HDD) 113GB (250GB HDD)
Communication Protocol:	SMB or WebDAV
Supported Client PC:	Windows (Windows 2000/XP/7 Windows Vista)

Maximum Number of Concurrent Connections:	SMB: 32 WebDAV: 12 (Active Sessions)
---	---

Advanced Box Features:	Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support
------------------------	--

### Memory Media

Standard:	USB Memory
Optional:	SD, SDHC, CompactFlash®, Memory Stick, Microdrive

### Security Features

#### Standard

Department ID Management, Single Sign-On H, Access Management System (Device and Function Level Log-in), Secure Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMP v1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Format, IPSec, Adobe® LiveCycle® Rights Management ES2.5 Integration

#### Optional

Removable HDD, HDD Erase, HDD Encryption, HDD Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, Secure Watermark, IEEE 2600.1 Common Criteria Certification†

### Environmental Information

- ENERGY STAR® Qualified
- Blue Angel
- RoHS Compliant
- WEEE Directive
- Ecomark

## Optional Accessories

### Paper Supply Options

#### Cassette Feeding Unit-AF1

Paper Capacity:	550 Sheets x 2 Cassettes [20 lb. Bond (80g/m <sup>2</sup> )]
Acceptable Paper Weight:	16 lb. Bond to 34 lb. Bond (60 to 128g/m <sup>2</sup> )
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (140mm x 182mm to 297mm x 431mm)]
Power Source:	From Main Unit
Power Consumption:	Approximately 30W (Maximum)
Dimensions (H x W x D):	9-3/4" x 22-1/4" x 25-5/8" (248mm x 565mm x 650mm)
Weight:	Approximately 61 lb. (27.5kg)

#### Paper Deck Unit-B2

Paper Capacity:	2,700 Sheets [20 lb. Bond (80g/m <sup>2</sup> )]
Number of Drawers:	1
Acceptable Paper Weight:	16 lb. Bond to 34 lb. Bond (60 to 128g/m <sup>2</sup> )
Acceptable Paper Size:	Letter
Power Source:	From Main Unit
Power Consumption:	Approximately 35W (Maximum)
Dimensions (H x W x D):	22-1/2" x 23-5/8" x 24-1/2" (570mm x 601mm x 621mm)
Weight:	Approximately 81.6 lb. (37kg)

#### Envelope Feeder Attachment-D1\*\*\*

Paper Capacity:	50 Sheets (or 30mm in height)
Acceptable Paper Size:	COM10 No.10, Monarch, DL, ISO-C5, ISO-B5
Feeding Speed:	10 cpm
Dimensions (H x W x D):	3-1/4" x 17-1/4" x 12-1/8" (81mm x 439mm x 307mm)
Weight:	Approx. 2.6 lb. (1.2kg)

### Output Options

#### Inner 2-Way Tray-H1\*\*

Number of Trays:	2
Total Output Capacity:	<b>Upper Tray:</b> 250 Sheets (20 lb. Bond) <b>Lower Tray:</b> 100 Sheets (20 lb. Bond)
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 11-3/4" x 17" (99mm x 144mm to 297mm x 431mm)], and Envelopes
Dimensions (H x W x D):	3" x 16-3/4" x 16" (76mm x 427mm x 407mm)
Weight:	Approximately 1 lb. (574g)

#### Inner Finisher-D1

Number of Trays:	Up to 2 Trays (with Inner Finisher Additional Tray-A1)
Total Output Capacity:	<b>Without Inner Finisher Additional Tray-A1:</b> 1,000 Sheets <b>With Inner Finisher Additional Tray-A1:</b> <b>Top Tray:</b> 100 Sheets (Letter) <b>Lower Tray:</b> 500 Sheets (Letter)
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Envelopes
Staple Positions:	<b>Corner/Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R, Executive
Maximum Stapling Capacity:	<b>Letter, Executive:</b> 50 Sheets (14 lb. Bond to 22 lb. Bond) 30 Sheets (23 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover) <b>11" x 17", Legal and Letter-R:</b> 30 Sheets (14 lb. Bond to 22 lb. Bond) 20 Sheets (23 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover)
Paper Capacity of Staple Mode:	<b>Upper Tray:</b> 15 Sets (or 3/8" height) <b>Lower Tray:</b> 30 Sets (or 4-7/8" height)
Type of Staple:	Staple-J1 (5,000 x 3)
Power Source:	From Main Unit
Power Consumption:	Approximately 49W (Maximum)
Dimensions (H x W x D):	11-5/8" x 27-1/2" x 21-7/8" (295mm x 697mm 554mm) (when the Auxiliary Tray is extended)
Weight:	Approximately 29.7 lb. (13.5kg) (when the optional Inner Finisher Additional Tray-A1 is attached)



## Optional Accessories (continued)

### Staple Finisher-G1

Number of Trays: 2

Total Output Capacity:	3,000 Sheets (Letter, Statement-R, Executive)
<b>Top Tray:</b>	1,300 Sheets (Letter, Executive)
	650 Sheets (11" x 17", Legal, Letter-R, Statement-R)
<b>Lower Tray:</b>	1,700 Sheets (Letter, Executive)
	650 Sheets (11" x 17", Legal, Letter-R, Statement-R)
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R
Staple Positions:	<b>Corner/Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R, Executive
Maximum Stapling Capacity:	<b>Letter, Executive:</b> 50 Sheets [20 lb. Bond (80g/m <sup>2</sup> )] <b>11" x 17", Legal, Letter-R:</b> 30 Sheets [20 lb. Bond (80g/m <sup>2</sup> )]
Paper Capacity of Staple Mode:	<b>Top Tray:</b> 1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R) <b>Lower Tray:</b> 1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Type of Staple:	Staple-J1 (5,000 x 3)
Power Source:	From Main Unit
Power Consumption:	Approximately 85W (Maximum)
Dimensions (H x W x D):	43-1/4" x 25-1/2" x 25-1/2" (1097mm x 648mm x 648mm) (when the Auxiliary Tray is extended)
Weight:	Approximately 101 lb. (46kg)

### Booklet Finisher-G1

Number of Trays: 2

Total Output Capacity:	3,000 Sheets (Letter, Statement-R, Executive)
<b>Top Tray:</b>	1,300 Sheets (Letter, Statement-R, Executive)
	650 Sheets (11" x 17", Legal, Letter-R)
<b>Lower Tray:</b>	1,700 Sheets (Letter, Statement-R, Executive)
	650 Sheets (11" x 17", Legal, Letter-R)
Acceptable Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R
Staple Positions:	<b>Corner/Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R, Executive <b>Saddle-Stitch:</b> 11" x 17", Legal, Letter-R
Maximum Stapling Capacity:	<b>Letter and Executive:</b> 50 Sheets (14 lb. Bond to 22 lb. Bond) 30 Sheets (23 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover) <b>11" x 17", Legal and Letter-R:</b> 30 Sheets (14 lb. Bond to 22 lb. Bond) 20 Sheets (23 lb. Bond to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover)
Paper Capacity of Staple Mode:	<b>Top Tray:</b> 1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R) <b>Lower Tray:</b> 1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Maximum Saddle-Stitch Capacity:	16 Sheets (16 lb. Bond to 22 lb. Bond) (11" x 17", Legal, Letter-R) 10 Sheets (22 lb. Bond to 28 lb. Bond) (11" x 17", Legal, Letter-R)
Paper Capacity of Saddle-Stitch Mode:	25 Booklets (5-sheet Booklets)
Type of Staple:	Staple-J1 (5,000 x 3) Staple Cartridge-D1 (2,000 x 3)
Power Source:	From Main Unit
Power Consumption:	Approximately 113W (Maximum)
Dimensions (H x W x D):	43-1/4" x 30-1/8" x 25-1/2" (1097mm x 766mm x 646mm) (when the Auxiliary Tray is extended)
Weight:	Approximately 165 lb. (75kg)

### Inner 2/3-Hole Puncher-A1\*

Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Punch Paper Size:	11" x 17", Legal, Letter, Letter-R
Punch Type:	<b>2 Holes:</b> Legal, Letter-R <b>3 Holes:</b> 11" x 17", Letter
Distance Between Punch Holes:	<b>2 Holes:</b> 2-3/4" (70mm) <b>3 Holes:</b> 4-1/4" (108mm)
Punch Waste Tray Capacity:	Approximately 1,500 Sheets (21 lb. Bond)
Power Source:	From Main Unit
Power Consumption:	Approximately 37W (Maximum)
Dimensions (H x W x D):	8-1/2" x 5-5/8" x 20-7/8" (216mm x 144mm x 531mm)
Weight:	Approximately 15.2 lb. (6.9kg)

### External 2/3-Hole Puncher-B2\*\*

Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220g/m <sup>2</sup> )
Acceptable Punch Paper Size:	11" x 17", Legal, Letter, Letter-R
Punch Type:	<b>2 Holes:</b> Legal, Letter-R <b>3 Holes:</b> 11" x 17", Letter
Distance Between Punch Holes:	<b>2 Holes:</b> 2-3/4" (70mm) <b>3 Holes:</b> 4-1/4" (108mm)
Punch Waste Tray Capacity:	Approximately 3,000 Sheets (21 lb. Bond)
Power Source:	From the Main Unit
Dimensions (H x W x D):	35-3/4" x 4-1/4" x 24-1/2" (908mm x 107mm x 623mm)
Weight:	Approximately 15.9 lb. (7.2kg)



## Other Optional Accessories

- Cabinet Type-G
- Platen Cover Type-R□□
- Inner Finisher Additional Tray-A1▲
- Inner Finisher-D1 with 2/3-Hole Puncher-A1▲▲▲
- Utility Tray-A2
- USB Keyboard
- Card Reader-F1■
- Copy Card Reader Attachment Kit-B2
- Convenience Stapler-B1
- Braille Label Kit-F1
- ADF Access Handle-A1
- imageRUNNER ADVANCE Essentials
- Universal Send Advanced Feature Set-E1
- Universal Send Security Feature Set-D1
- Universal Send Digital User Signature Kit-C1
- Super G3 Fax Board-AK1
- Super G3 2nd Line Fax Board-AK1■
- Super G3 3rd/4th Line Fax Board-AE1■■■
- Remote Fax Kit-A1◆
- PCL Printer Kit-AN1
- PCL International Font Set-A1◆◆
- PS Printer Kit-AN1
- Direct Print Kit (for PDF/XPS)-H1
- Encrypted Secure Print-D1
- Barcode Printing Kit-D1◆◆
- Web Access Software-H1◆◆◆
- Secure Watermark-B1
- Wireless LAN Board-B2◇
- USB Device Port-D1
- Multimedia Reader/Writer-A2◇◇
- Additional Memory Type A (512MB)◇◇◇
- Document Scan Lock Kit-B1△
- Data Erase Kit-C1
- HDD Data Encryption and Mirroring Kit-C4
- HDD Mirroring Kit-F1
- Removable HDD Kit-AF1
- 2.5-inch/80GB HDD-C1△△
- 2.5-inch/250GB HDD-D1
- iR-ADV Security Kit-B1 for IEEE 2600.1 Common Criteria Certification†
- Expansion Bus-F2
- Voice Guidance Kit-F2△△△
- Voice Operation Kit-C2△△△
- Remote Operator's Software Kit-B1
- Copy Control Interface Kit-A1
- eCopy Suite
- imageWARE Suite

- \* Duplexing Automatic Document Feeder-AG1 optional on 4035/4025 models.
- \*\* Platen Cover Type-R or Duplexing Automatic Document Feeder-AG1 must be selected on 4035/4025 models.
- \*\*\* Installs in Cassette 2.
  - Includes DADF and consumables.
- Standard color scan support for 100 dpi and 300 dpi. Up to 600-dpi scanning requires Additional Memory Type A (512MB).
- EPS and XPS cannot be printed directly from Memory Media or Advanced Box.
  - † Specified configurations and settings need to be applied to the device in order to achieve and maintain IEEE 2600.1 Common Criteria Certification. Contact your Canon Authorized Dealer for more information.
  - †† Cannot be installed with Booklet Finisher-G1, Staple Finisher-G1, or Inner Finisher-D1.
    - ▲ Requires Inner Finisher-D1.
    - ▲▲ Requires Staple Finisher-G1 or Booklet Finisher-G1.
    - ▲▲▲ Cannot be installed with Inner Finisher-D1 or 2/3 Hole Puncher-A1.
      - Requires Copy Card Reader Attachment Kit-B2.
      - Requires Super G3 Fax Board-AK1.
      - Requires Super G3 Fax Board-AK1 and Super G3 2nd Line Fax Board-AK1, and Additional Memory Type A (512MB).
        - ◆ Cannot be installed with Super G3 Fax Board-AK1.
        - ◆◆ Requires PCL Printer Kit-AN1.
        - ◆◆◆ Requires PS Printer Kit-AN1 or Direct Print Kit (for PDF/XPS)-H1 when printing PDF files.
          - ◇ Requires Expansion Bus-F2.
          - ◇◇ Requires USB Device Port-D1.
          - ◇◇◇ Required for 200-dpi, 400-dpi, and 600-dpi color scanning and 3/4 Line Faxing.
            - △ Contact your Canon Authorized Dealer for availability.
            - △△ 80GB HDD for Mirroring functionality only; cannot be used to increase storage.
            - △△△ Voice Operation Kit-C2 and Voice Guidance Kit-F2 cannot be installed together.

NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.



1-800-OK-CANON  
www.usa.canon.com

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGERUNNER, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice.

©2012 Canon U.S.A., Inc. All rights reserved.  
0312-4051/4045/4035/4025SS-PDF-IH

